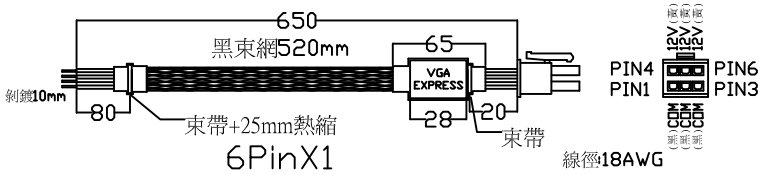
650
黑束網520mm
65
VGA
EXPRESS
剝鍍10mm
80
束帶+25mm熱縮
28
20
束帶
6PinX1
PIN4
PIN1
PIN6
PIN3
+12V
+12V
+12V
GND
GND
GND
線徑18AWG

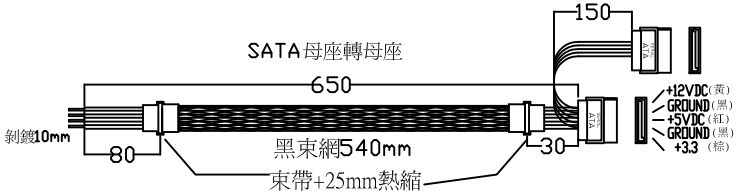
150
SATA母座轉母座
650
剝鍍10mm
80
黑束網540mm
30
束帶+25mm熱縮
+12VDC(黃)
GROUND(黑)
+5VDC(紅)
GROUND(黑)
+3.3 (棕)

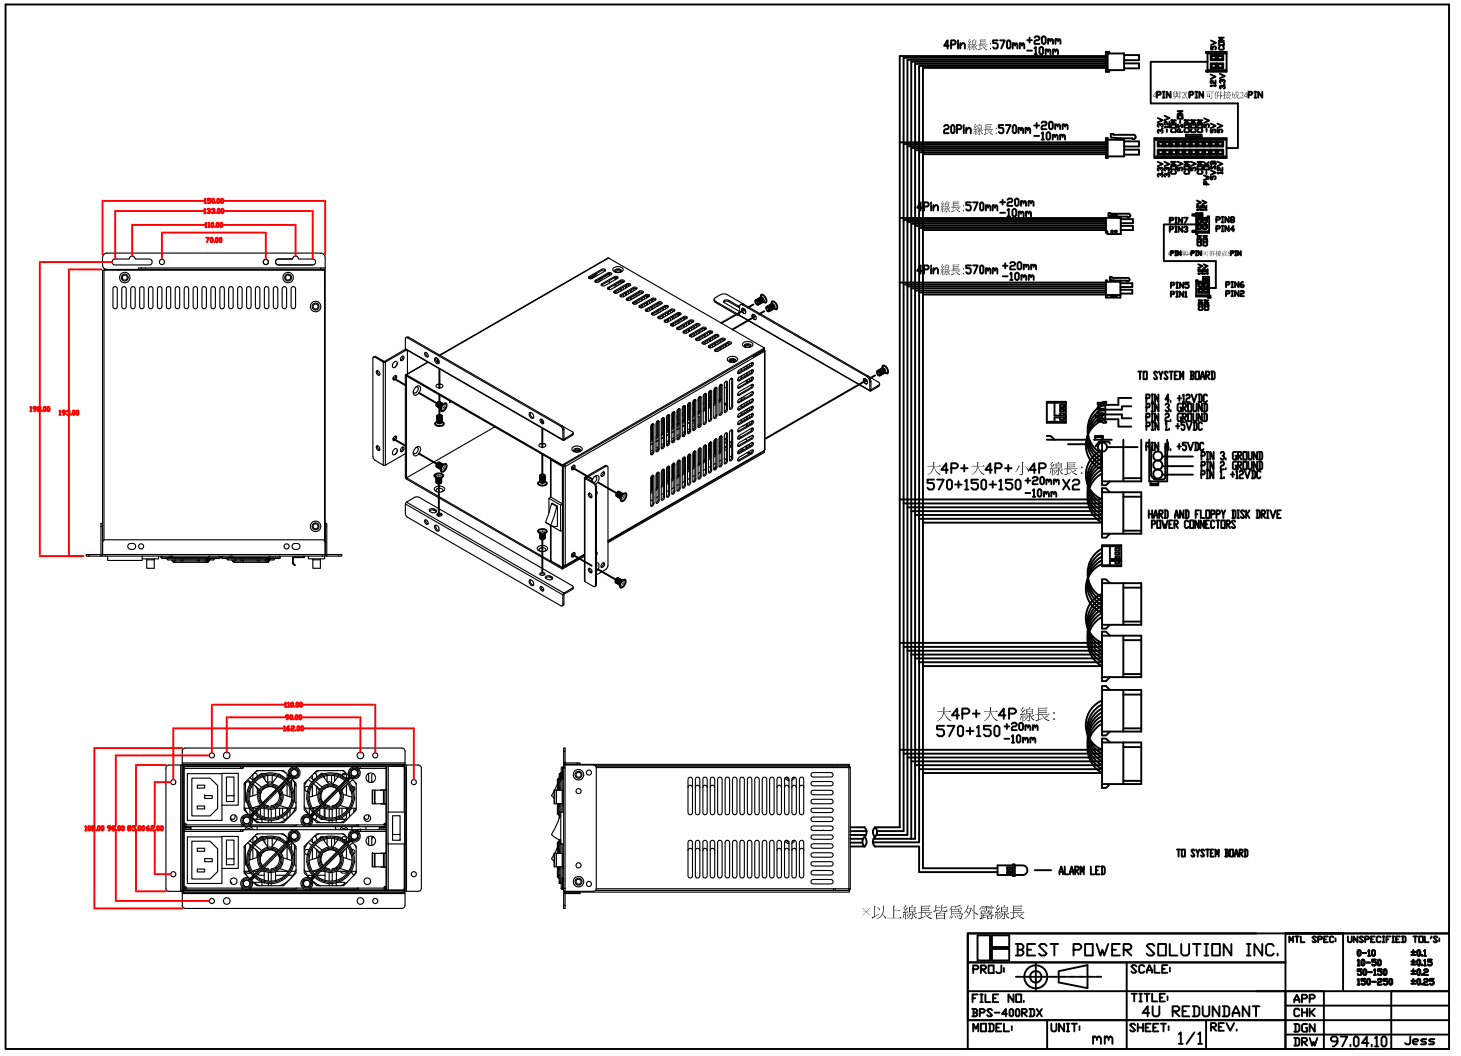
4Pin線長:570mm +20mm -10mm
20Pin線長:570mm +20mm -10mm
4Pin線長:570mm +20mm -10mm
4Pin線長:570mm +20mm -10mm
TO SYSTEM BOARD
PIN 4 +12VDC
PIN 3 GROUND
PIN 2 GROUND
PIN 1 +5VDC
大4P+大4P+小4P線長:
570+150+150 +20mm -10mm X2
HARD AND FLOPPY DISK DRIVE
POWER CONNECTORS
大4P+大4P線長:
570+150 +20mm -10mm
ALARM LED
TO SYSTEN BOARD
×以上線長皆爲外露線長
BEST POWER SOLUTION INC.
PROJ:
SCALE:
FILE NO.
BPS-400RDX
TITLE:
4U REDUNDANT
MODEL:
UNIT: mm
SHEET: 1/1
REV.
MTL SPEC:
UNSPECIFIED TOL'S:
0~10 ±0.1
10~50 ±0.15
50~150 ±0.2
150~250 ±0.25
APP
CHK
DGN
DRW 97.04.10 Jess